


- NOTES**
- SEE REFLECTED CEILING PLAN FOR PARTITION HEIGHTS AND FIRE RATINGS.
 - RECESS CONCRETE SLAB FOR FLOOR FINISH IN ROOMS 123, 125, 129, 130, 131, 133, AND 134.
 - TACKBOARDS (TKBD) AND MARKER BOARDS (MKB) ARE 4" HIGH BY LENGTH NOTED ON PLAN UNLESS NOTED OR SHOWN OTHERWISE.
 - CONTROL JOINTS (CJ) IN INTERIOR MASONRY PARTITION - SIMILAR TO DETAIL B/10.2.
 - FIRE EXTINGUISHER CABINETS (FEC) - SEE DETAIL A/10.4.
 - COAT HOOKS (CH) - SEE DETAIL B/10.3.
 - PROVIDE WINDOW BLINDS AT ALL EXTERIOR WINDOWS EXCEPT ROOMS 128, 103, 103C, AND VESTIBULES.
 - PROVIDE WINDOW BLINDS AT INTERIOR WINDOWS 1, 2, 3, 4, 5, 6, 7, AND SIGHTLITS 121, 122, AND 127.
 - LOCKER EQUIPMENT NOT INCLUDED IN BASE BID. INCLUDE IN ALTERNATE No. 2.
 - SEE SECTION D/A6 FOR FULL HEIGHT MASONRY WALL INTERSECTION WITH ROOF STRUCTURE.
 - SEE SHEETS 9.6 AND 9.7 FOR CORRIDOR TERRAZZO PATTERN AND SLAB CONTROL JOINT LAYOUT.
 - ALL WALL VAPOR BARRIERS SHOWN ON DRAWINGS ARE POLY. TAPE ALL PERIMETERS TO STRUCTURE.
 - PROVIDE POLY VAPOR BARRIER BELOW BUILDING SLABS ON GRADE.
 - ALL CMU IS 6" UNLESS NOTED OTHERWISE.

FLOOR PLAN
1/8"=1'-0"

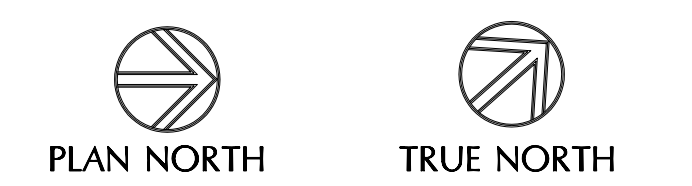

**ADVANCED
TECHNOLOGY
CENTER -
DMACC**

ANKENY, IOWA

A1

Date: AUGUST 16, 1993